



Fuyang Cheerfree Mechanical Manufactory

Web: www.cheersonic.com

E-mail: cheerfree@hotmail.com

Tel: +86 0571 63372511 Fax: +86 0571 63373831

Mobile: 13588732518 MSN: cheerfree@hotmail.com


Cleaning Ultrasonic Transducer

Model	Frequency	Resonant Impedance	Capacity	Size		Resistance	Power
				Diameter	Span		
	KHz	Ω	pF	mm	mm	2500VDC	W
CFTC-AH2080	80±2	≤25	1800±10%	24	26	2000M Ω	30
CFTC-AH3050	50±1	≤20	3400±10%	38	40	2000M Ω	40
CFTC-SS3528	28±0.5	≤20	3800±10%	45	80	2000M Ω	50
CFTC-SH3528A	28±0.5	≤20	4000±10%	55	68	2000M Ω	50
CFTC-SH3528B	28±0.5	≤20	2900±10%	55	68	2000M Ω	50
CFTC-AH3540	40±1	≤20	3800±10%	45	54	2000M Ω	50
CFTC-SH3540	40±1	≤20	4000±10%	45	50	2000M Ω	50
CFTC-SH3825	25±0.5	≤20	4800±10%	59	72	2000M Ω	60
CFTC-SH3828A	28±0.5	≤20	4800±10%	59	67	2000M Ω	60
CFTC-SH3828B	28±0.5	≤20	3200±10%	59	68	2000M Ω	60
CFTC-SH3833	33±0.5	≤20	4800±10%	48	60	2000M Ω	60
CFTC-SH3840A	40±1	≤20	4800±10%	48	50	2000M Ω	60
CFTC-SH3840B	40±1	≤20	3400±10%	48	50	2000M Ω	60
CFTC-SS38130A	130±2	≤20	4800±10%	40	54	2000M Ω	60
CFTC-SS38130B	130±2	≤20	3200±10%	38	57	2000M Ω	60
CFTC-SS4530	30±0.5	≤20	7200±10%	45	82	2000M Ω	80
CFTC-SH5025	25±0.5	≤20	9000±10%	67	77	2000M Ω	100
CFTC-SH5028A	28±0.5	≤20	9000±10%	67	70	2000M Ω	100
CFTC-SH5028B	28±0.5	≤20	6500±10%	67	70	2000M Ω	100
CFTC-SH3540	40±1	≤20	2900±10%	45	50	2000M Ω	50
CFTC-SH3560	60±2	≤20	2900±10%	40	38	2000M Ω	50
CFTC-SH3833	28±0.5	≤20	3200±10%	48	60	2000M Ω	60

CFTC-SH3838	38±1	≤20	3200±10%	48	54	2000MΩ	60
CFTC-SH4525	25±0.5	≤20	5100±10%	67	72	2000MΩ	80
CFTC-SH4528	28±0.5	≤20	5100±10%	67	68	2000MΩ	80
CFTC-SS4530	30±0.5	≤20	5100±10%	45	82	2000MΩ	80
CFTC-SH5025	25±0.5	≤20	6500±10%	67	77	2000MΩ	100

Naming

CFCC-35*15*5-W

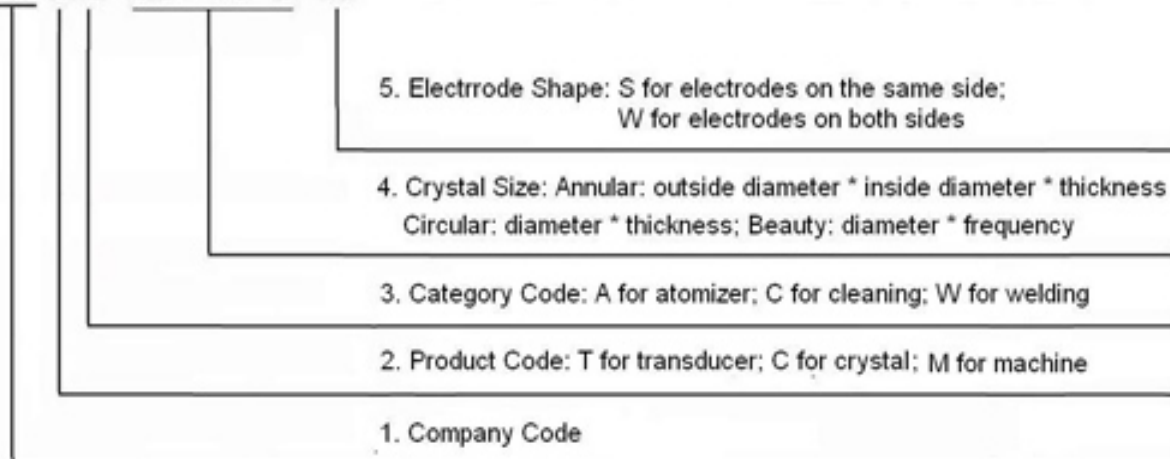

CFTC-AH2080



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	80±2
Capacity	pF	1800±10%
Impedance	Ω	≤25
Insulation Resistance	M Ω	2000
Power	W	30

CFTC-AH3540



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	40±1
Capacity	pF	3800±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	50

CFTC-SS3528



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	3800±10%
Impedance	Ω	≤20
Insulation Resistance	MΩ	2000
Power	W	50

CFTC-SH3528A



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	4000±10%
Impedance	Ω	≤20
Insulation Resistance	MΩ	2000
Power	W	50

CFTC-SH3528B



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	2900±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	50

CFTC-SH3828A



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	4800±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	60

CFTC-SH3828B



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	3200±10%
Impedance	Ω	≤20
Insulation Resistance	MΩ	2000
Power	W	60

CFTC-SH3840A



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	40±1
Capacity	pF	4800±10%
Impedance	Ω	≤20
Insulation Resistance	MΩ	2000
Power	W	60

CFTC-SH3840B



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	40±1
Capacity	pF	3400±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	60

CFTC-SH5028A



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	9000±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	100

CFTC-SH5028B



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	28±0.5
Capacity	pF	6500±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	100

CFTC-SS38130A



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	130±2
Capacity	pF	4800±10%
Impedance	Ω	≤20
Insulation Resistance	M Ω	2000
Power	W	60

CFTC-SS38130B



ELECTRICAL SPECIFICATION		
Item	Unit	Parameter
Frequency	KHz	130±2
Capacity	pF	3200±10%
Impedance	Ω	≤20
Insulation Resistance	MΩ	2000
Power	W	60